


3D pedometer chipset  
IIC interface for Wrist application

## Product Specification

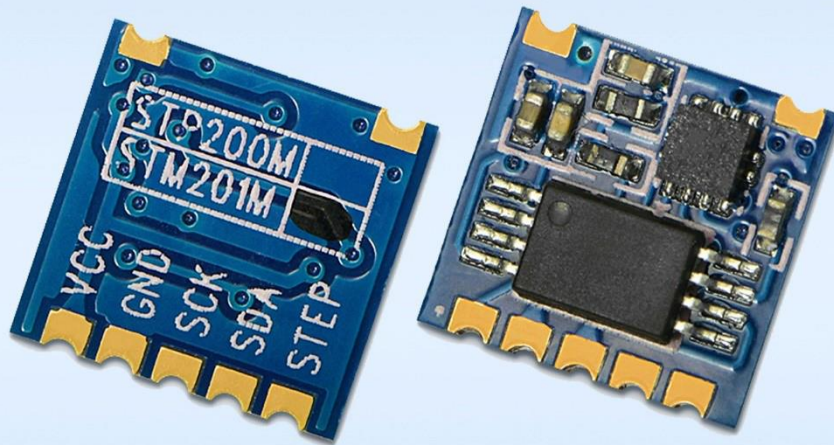

## Catalog

1. Description:.....	- 3 -
2. Features:.....	- 3 -
3. Application:.....	- 3 -
4. Specifications:.....	- 3 -
5. Working mode:.....	- 4 -
6. Pin Definition:.....	- 5 -
7. Dimension:.....	- 6 -
8. Soldering condition:.....	- 6 -

### Note: Revision History

Revision	Date	Comment
V1.0	2021-1-21	First release

## 1. Description:

STP201M is a 3D pedometer module with functional IC chipset which include a G-sensor and MCU. It has adopted the standard IIC interface, with the 3D MEMS sensor (G sensor) and high precision of 3D pedometer algorithm, it can give a precisely pedometer in any direction. This chipset has the characteristics of small size, low power consumption and etc. The standard I2C digital interface ensures it can be easily embedded in various kinds of pedometer functional system.

★Note:The algorithm of our pedometer is adjustable according to customer's requirement. We can provide the pedometer for shoes, table class pedometer and bracelet pedometer wearing on wrist, pedometer wearing on waist and pedometer putting inside the pocket. Pls indicate clearly when purchasing.

## 2. Features:

- IIC interface
- High precision 3D pedometer algorithm
- Low sleep current
- Ultra-small size

## 3. Application:

- 3D pedometer
- MP3 pedometer
- Pedometer shoes
- Outdoor handheld
- Healthcare products

## 4. Specifications:


Parameters	Condition	Performance			Unit
		Min.	Typ.	Max.	
Working voltage		2.3	3	3.6	v
Working current	@3V		60		uA
Sleep current			< 5		uA
Step resolution			1		Step
Pedometer wrror	Uniform Working		± 3%		Step

Working temperature		-10		50	°C
Storage temperature		-10		50	°C

## 5. Working mode:

### 1) Normal work

When detected step action, module will enter normal working mode, users can read the step value by I2C interface. The I2C communication protocol is as below:

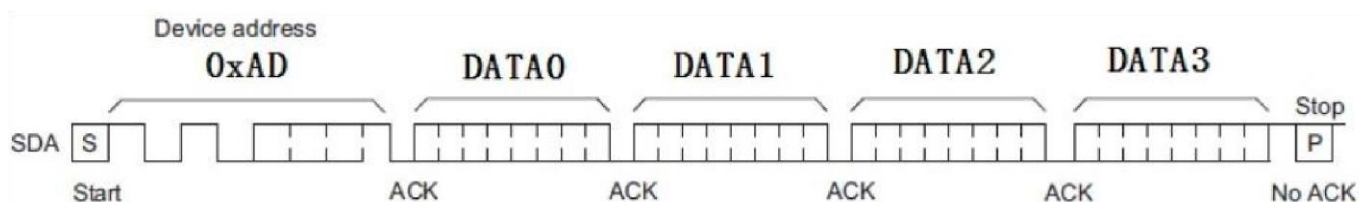

DATA0 : step lower byte

DATA1 : step high byte

DATA2 := DATA0 + DATA1

DATA3 := DATA2


When the steps overflow ( 0xFFFF ) , it count from 0.

The steps will be cleared when DATA3 is read.

Note: All the bytes are hexadecimal

### 2) Sleeping mode


The chipset will enter normal working mode when step action is detected, and enter sleeping mode if no step action is detected for 20s. In sleep mode the G sensor doesn't work, the MCU will enter deep sleeping mode and the whole is in low power consumption.



Note: This module can be wakeup by I2C interface. There are some limitations when the module is wakeup by I2C interface. For the first “start” command of the I2C protocol, the SCL will have to hold at least 500us to wake up MCU. The maximum I2C clock is 100 KHz.


Also: STEP\_OUT: The chipset can output the pulse for each step action, the high level of the pulse signal is around 50ms.

## 6. Pin Definition:

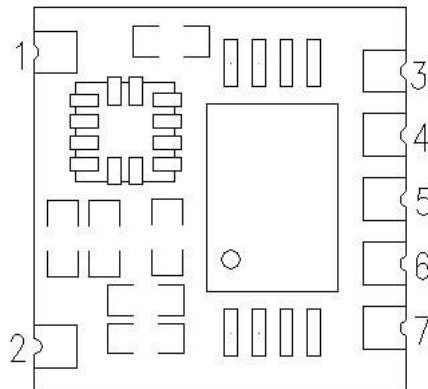


Pin NO.	Pin name	Description
1	GND	Connect ground
2	GND	Connect ground
3	VCC	Connect positive power 2.3-3.6V
4	GND	Connect ground
5	SCK	I2C clock output
6	SDA	I2C data output
7	STEP	Puls-output pin

## 7. Dimension:

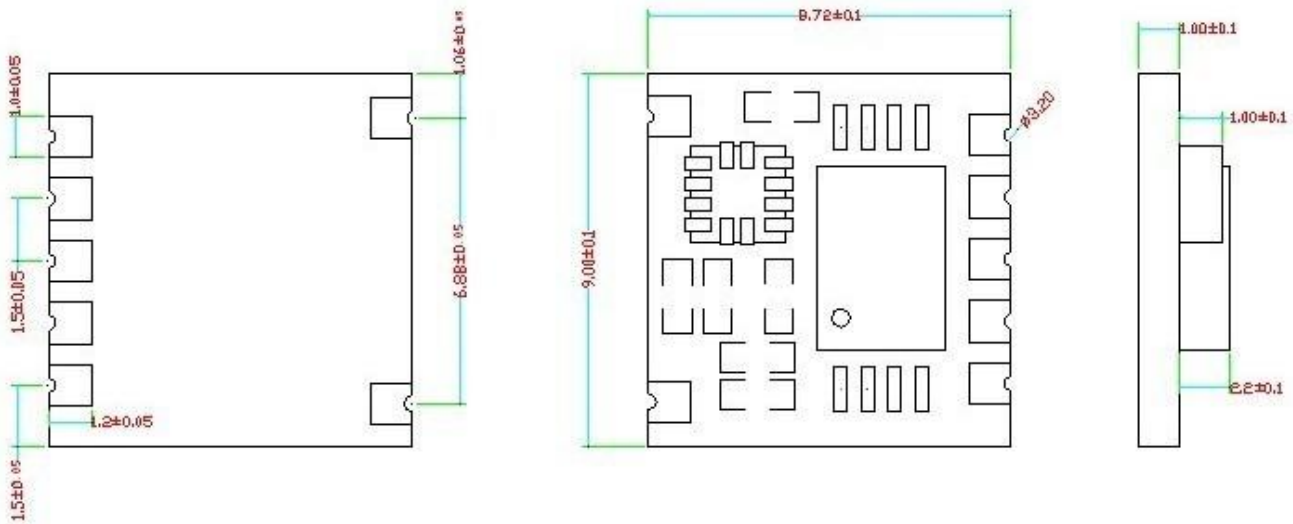

## 8. Soldering condition:

### 1) Soldering temperature curve;

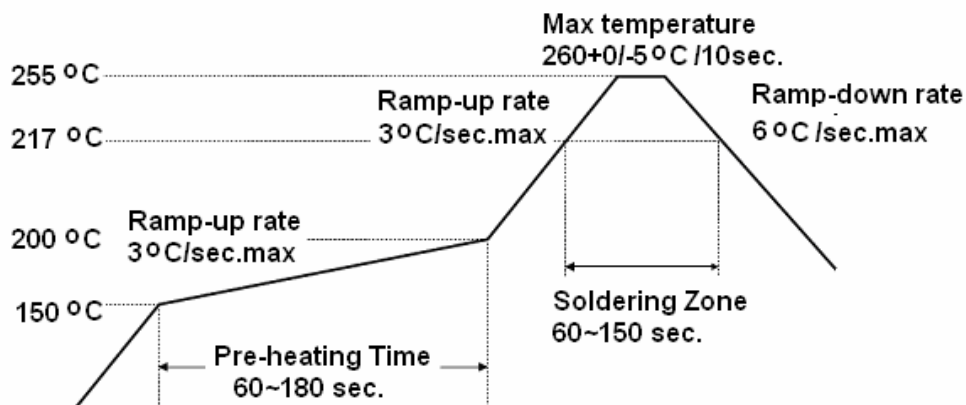

### 2) Don't reflow more than twice;

### 3) Don't press the chip when during the soldering;

### 4) Don't bent circuit board after the soldering.