



Installation Kit Components




FresherVent

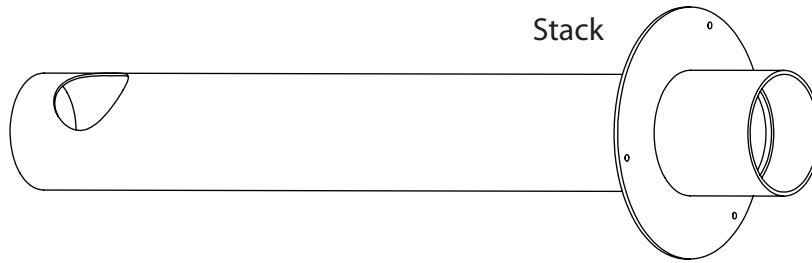


Stack


Screw (3x)



Anchor (3x)



Drilling Screw



Tools Required




Drill



Drill Bit





Phillips Bit

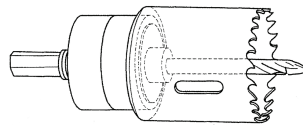

3 1/4" Hole Saw



Knife (optional)

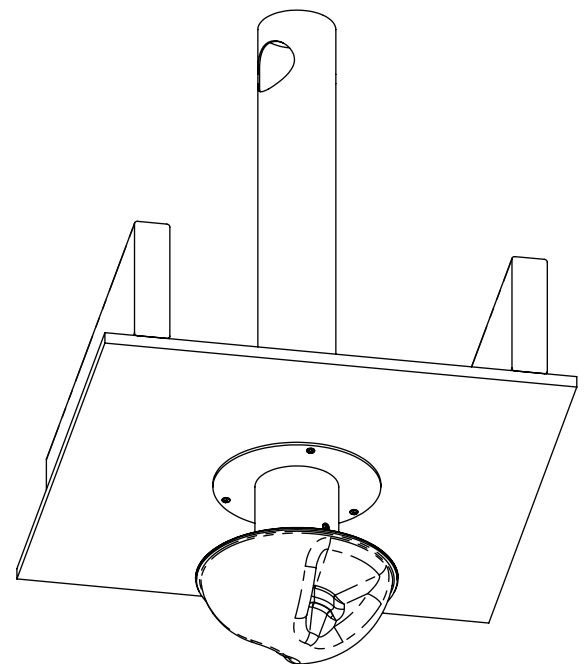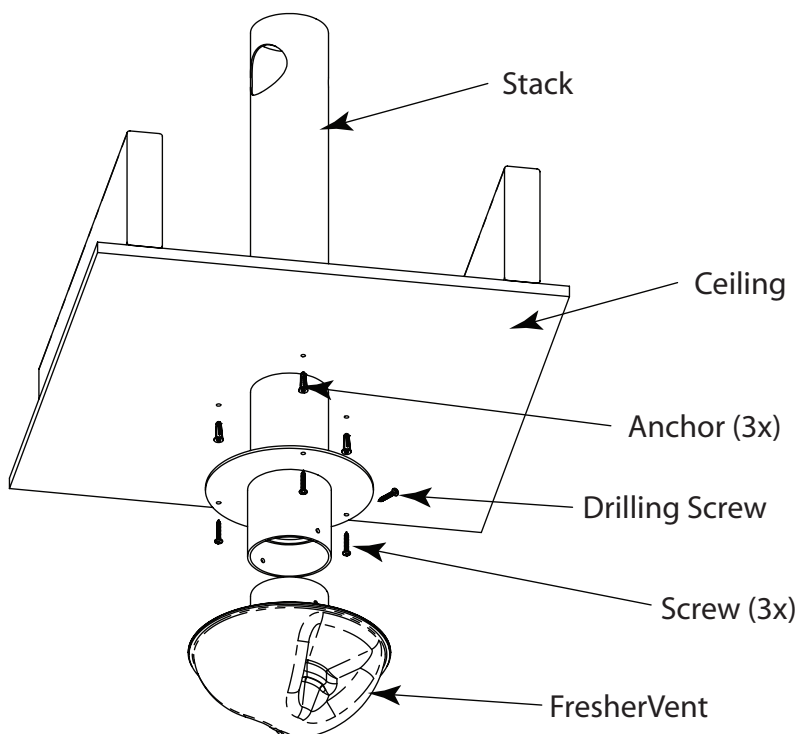

Installation Complete

Installation Instructions:

1. Cut hole in ceiling with 3-1/4" hole saw. (Figure A)
2. Cut through plastic sheet and insulation with knife if necessary.
3. Insert Stack and mark 3 hole locations for Anchors, then remove Stack. (Figure B)
4. Drill 3/16" holes for Anchors, then insert Anchors. (Figure C)
5. Insert Stack and fasten to ceiling with 3 Screws. (Figure B)
6. Insert FresherVent into pipe, install Drilling Screw to retain FresherVent. (Figure D)

